

# Video-inserter CI-VL2-RTI11-5

Compatible for  
**Volvo vehicles**

with **RTI 2011** infotainment and 5 inch monitor



**Video-inserter with rear-view camera input and 2 additional video inputs**

## Product features

- Video-inserter for factory-infotainment systems
- 1 CVBS Rear-view camera video-input
- 2 CVBS video-inputs for after-market devices (e.g. USB-Player, DVB-T2 tuner, ...)
- Built-in Audio-switch (no audio-insertion)
- Automatic switching to rear-view camera input on engagement of the reverse gear
- Video-in-motion (ONLY for connected video-sources)
- Video-inputs NTSC compatible

## Contents

### 1. Prior to installation

- 1.1. Delivery contents
- 1.2. Checking the compatibility of vehicle and accessories
- 1.3. Boxes and connectors
  - 1.3.1. Video-Interface
  - 1.3.2. CAN-bus box
  - 1.3.3. Dip-switch settings – interface
    - 1.3.3.1. Enabling the interface's video inputs (dip 2-3)
    - 1.3.3.2. Rear-view camera setting (dip 5)
    - 1.3.3.3. Monitor specific settings

### 2. Installation

- 2.1. Place of installation
  - 2.1.1. Place of Installation – video interface, CAN-bus box and daughter PCB
- 2.2. Connection schema
- 2.3. Connection - video-interface to Power/CAN
- 2.4. Analogue connection - video-interface
- 2.5. Connection – picture signal cable
- 2.5.1. Warning notes, concerning the installation of ribbon cables
- 2.6. Connection – video sources
- 2.7. Audio-switch and audio-insertion
- 2.8. After-market rear-view camera
  - 2.8.1. Case 1: CAN-box receives the reverse gear signal
  - 2.8.2. Case 2: CAN-box does not receive the reverse gear signal
- 2.9. Connection – External keypad
- 2.10. Picture settings

### 3. Video interface operation

- 3.1. By infotainment button
- 3.2. By external keypad
- 3.3. By white wire of the 6pin cable

### 4. Specifications

### 5. FAQ – Trouble Shooting-Interface functions

## Legal Information

By law, watching moving pictures while driving is prohibited, the driver must not be distracted. We do not accept any liability for material damage or personal injury resulting, directly or indirectly, from installation or operation of this product. Apart from using this product in an unmoved vehicle, it should only be used to display fixed menus or rear-view-camera video when the vehicle is moving (for example the MP3 menu for DVD upgrades).

Changes/updates of the vehicle's software can cause malfunctions of the interface. Up to one year after purchase we offer free software-updates for our interfaces. To receive a free update, the interface has to be sent in at own cost. Wages for de-and reinstallation and other expenditures involved with the software-updates will not be refunded.

No liability for vehicle wire colours and pin definition!

Changes by the vehicle manufacturer are possible. The given information has to be verified by the installer.

## 1. Prior to installation

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources.

### 1.1. Delivery contents



## 1.2. Checking the compatibility of vehicle and accessories

Requirements		
Brand	Compatible vehicles	Compatible systems
Volvo	Vehicles from model year 2011	RTI 2011 infotainment and 5inch monitor

**Limitations:**

*Video only*                      The interface inserts ONLY video signals into the infotainment. For inserting Audio signals either the possibly existing factory audio-AUX-input or a FM-modulator can be used.


*Factory rear-view camera*      Automatically switching-back from inserted video to factory rear-view camera is only possible while the reverse gear is engaged. To delay the switch-back an additional electronic part is required.

*Video input signal*                NTSC video sources compatible only.

## 1.3. Boxes and connectors


### 1.3.1. Video Interface

The video-interface converts the video signals of connected after-market sources in a factory monitor compatible picture signal which is inserted in the factory monitor, by using separate trigger options.

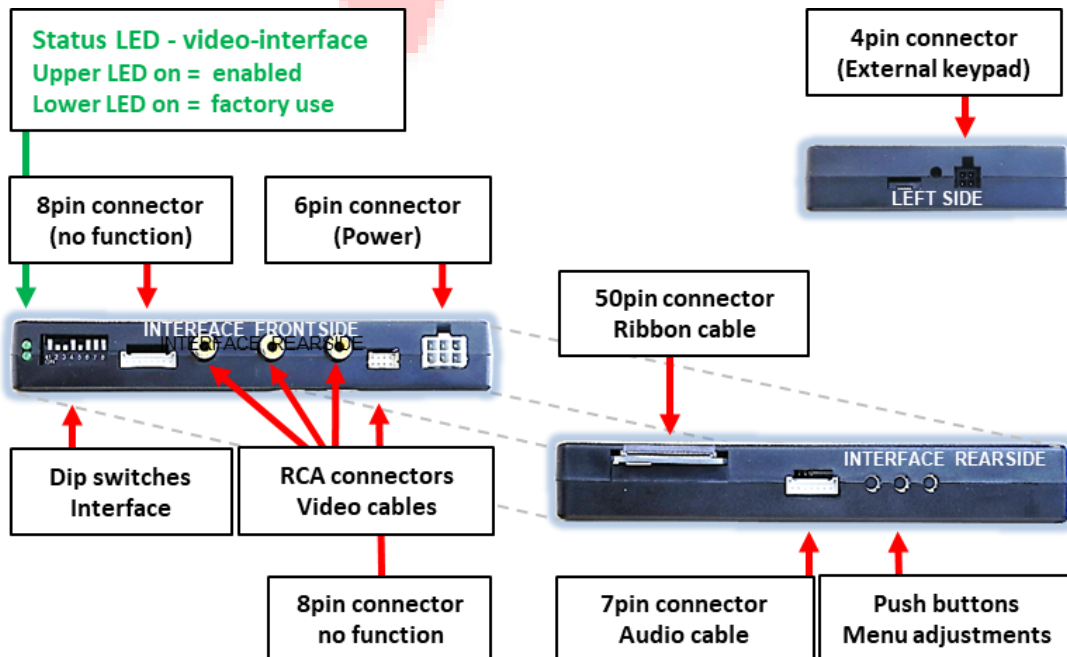


## 1.3.2. CAN-bus box

The CAN box reads the vehicle's digital signals out of the vehicle's CAN-bus and converts them for the video interface.

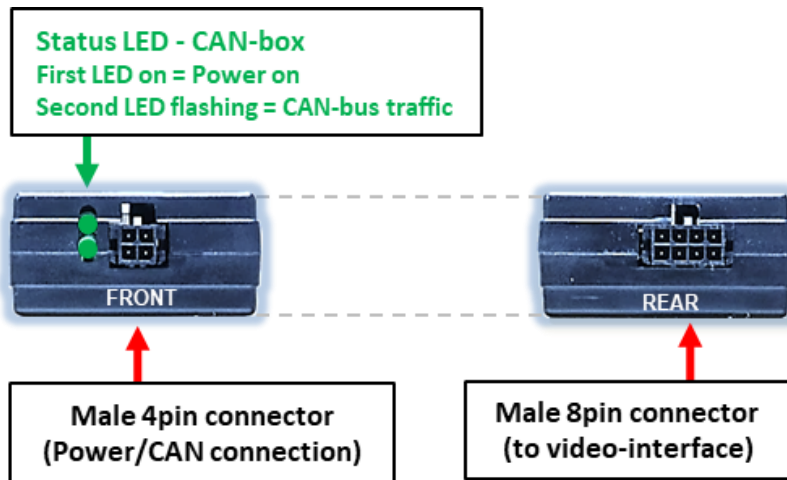

## 1.3.3. Dip-switch settings – interface

Some settings have to be selected by the dip-switches on the video interface. Dip position down is ON and position up is OFF.



Dip	Function	ON (down)	OFF (up)
1	No function		set to OFF
2	CVBS AV1-input	enabled	disabled
3	CVBS AV2-input	enabled	disabled
4	No function		set to OFF
5	After-market rear-view camera	split-screen mode with factory PDC	full-screen
6	No function		set to OFF
7	No function		set to OFF
8	No function		set to OFF

**After each Dip-switch-change a power-reset of the Can-box has to be performed!**

See the following chapters for detailed information.

### 1.3.3.1. Enabling the interface's video inputs (dip 2-3)

Only the enabled video inputs can be accessed by switching through the interface's video sources. It is recommended to enable only the required inputs, because the disabled inputs will be skipped while switching through the video interfaces inputs.

### 1.3.3.2. Rear-view camera setting (dip 5)

With dip switch position **OFF**, the after-market rear-view camera is displayed in full screen mode as long as reverse gear is engaged. When the dip switch is set to **ON**, the after-market rear-view camera is displayed in split-screen mode together with the factory PDC display as long as reverse gear is engaged.

**Note:** Dip 1, 4, 6, 7 and 8 are out of function and have to be set to **OFF**.

## 2. Installation

**To install the interface, first switch off the ignition and disconnect the vehicle's battery. Please read the owner's manual of the car, regarding the battery's disconnection! If required, enable the car's Sleep-mode (hibernation mode) In case the sleep-mode does not succeed, the disconnection of the battery can be done with a resistor lead.**


**If the necessary stabilized power supply for the interface is not taken directly from the battery, the chosen connection has to be checked for being constantly stabile.**

**The interface needs a permanent 12V source!**


### 2.1. Place of installation – video interface, CAN-bus box and daughter PCB

The interface box and the CAN-bus box are prepared to be connected behind the vehicle's monitor. The daughter PCB has to be installed inside the monitor.

## 2.2. Connection schema

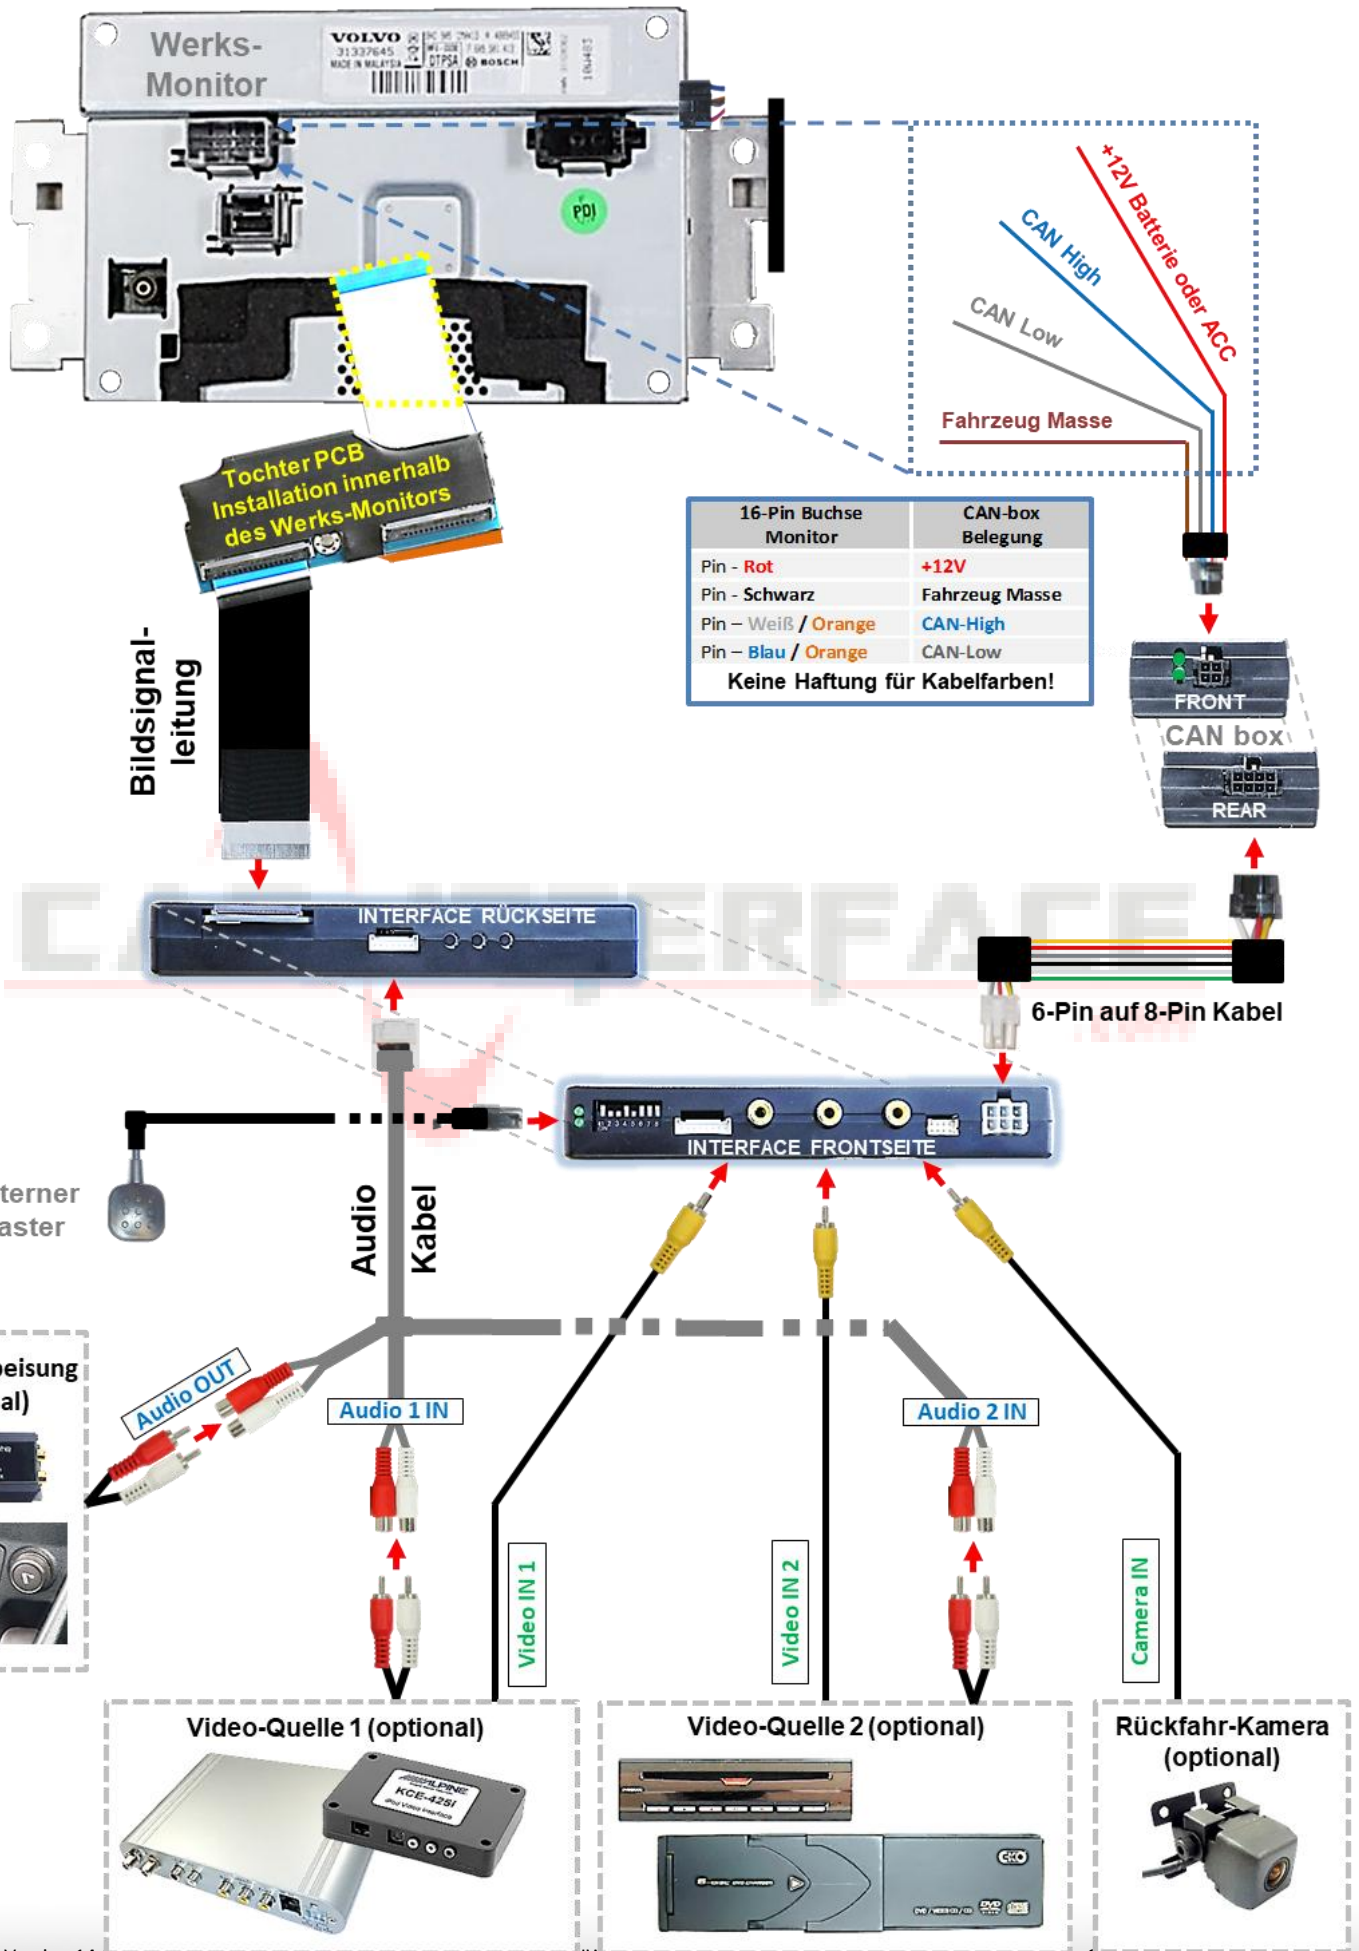

## 2.3. Connection - video-interface to Power / CAN

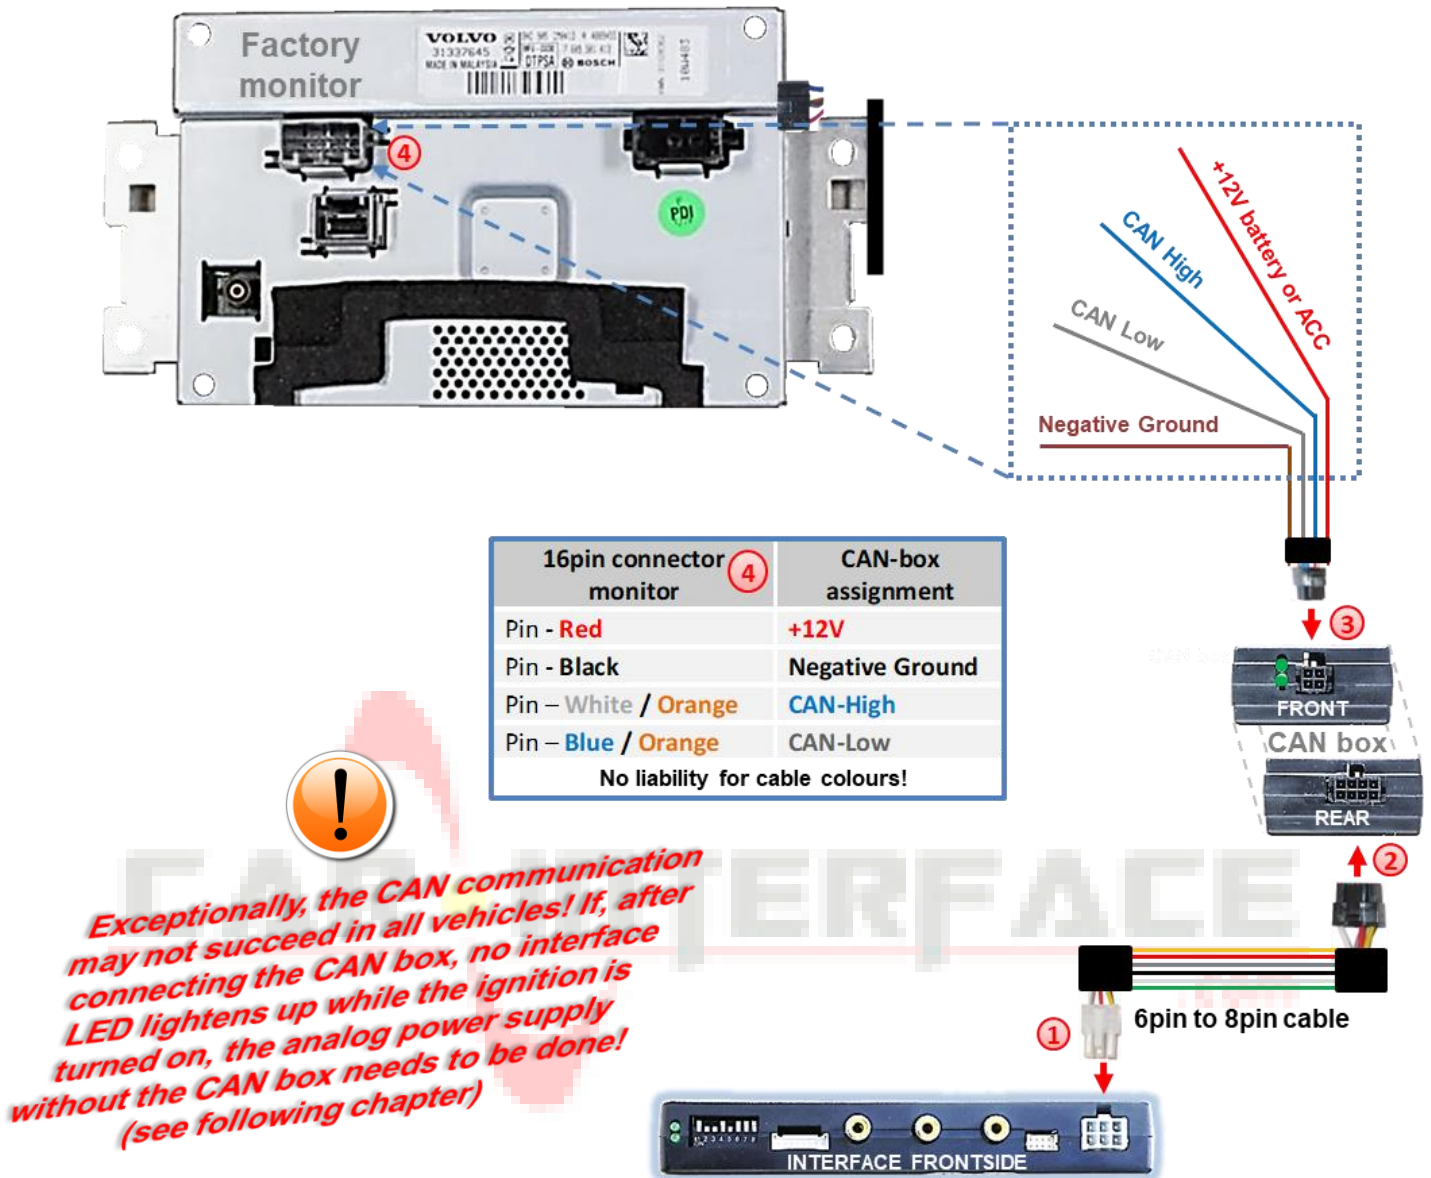

- ① Connect the 6pin to 8pin cable's white female 6pin connector to the male 6pin connector of the video interface.
- ② Connect the 6pin to 8pin cable's female black 8pin connector to the male 8pin connector of the CAN box.
- ③ Connect the Power/CAN cable's female black 4pin connector to the male 4pin connector of the CAN box.
- ④ Connect the 4 Power/CAN wires to the vehicle's Power/CAN supply harness which is connected to the monitor's 16pin connector.


**Note: No liability for vehicle wire colours and pin definition!**

Changes by the vehicle manufacturer are possible. The given information has to be verified by the installer.

## 2.4. Analogue connection - video-interface

If the communication between the CAN box and the vehicle's CAN bus does not succeed (not all vehicles are compatible), an analogue connection is required by connecting the 6pin to 8pin cable without the CN box.


Pin-Configuration White 6-Pin Power Connector	
● Pin 1 – ACC or Battery+12V	
● Pin 2 – ACC +12V	
● Pin 3 – CAN-Bus Control Data	
● Pin 4 – Ground	
● Pin 5 – Switch Input Rear View Camera shifts to CAM after +12V Signal	
○ Pin 6 – AV-Switch-Signal +5-12V Impulse	

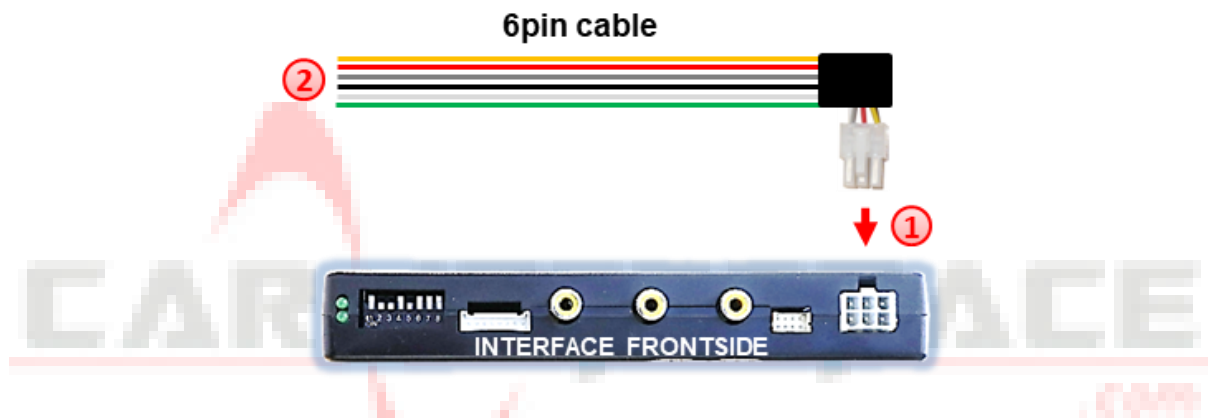

- 1 Connect the female 6pin connector of the 6pin to 8pin cable to the 6pin connector of the video interface.
- 2 Connect the yellow, the red and the black wire of the 6pin to 8pin cable to the vehicle's power and ground.

**Note:** The connection of the green wire (Reverse signal) will be described in chapter "After-market rear-view camera". The white wire, can be used by +12V impulse to switch the enabled video sources, same as the keypad (see chapter "video interface-operation"). The grey wire remains unconnected.

## 2.5. Connection - picture signal cable

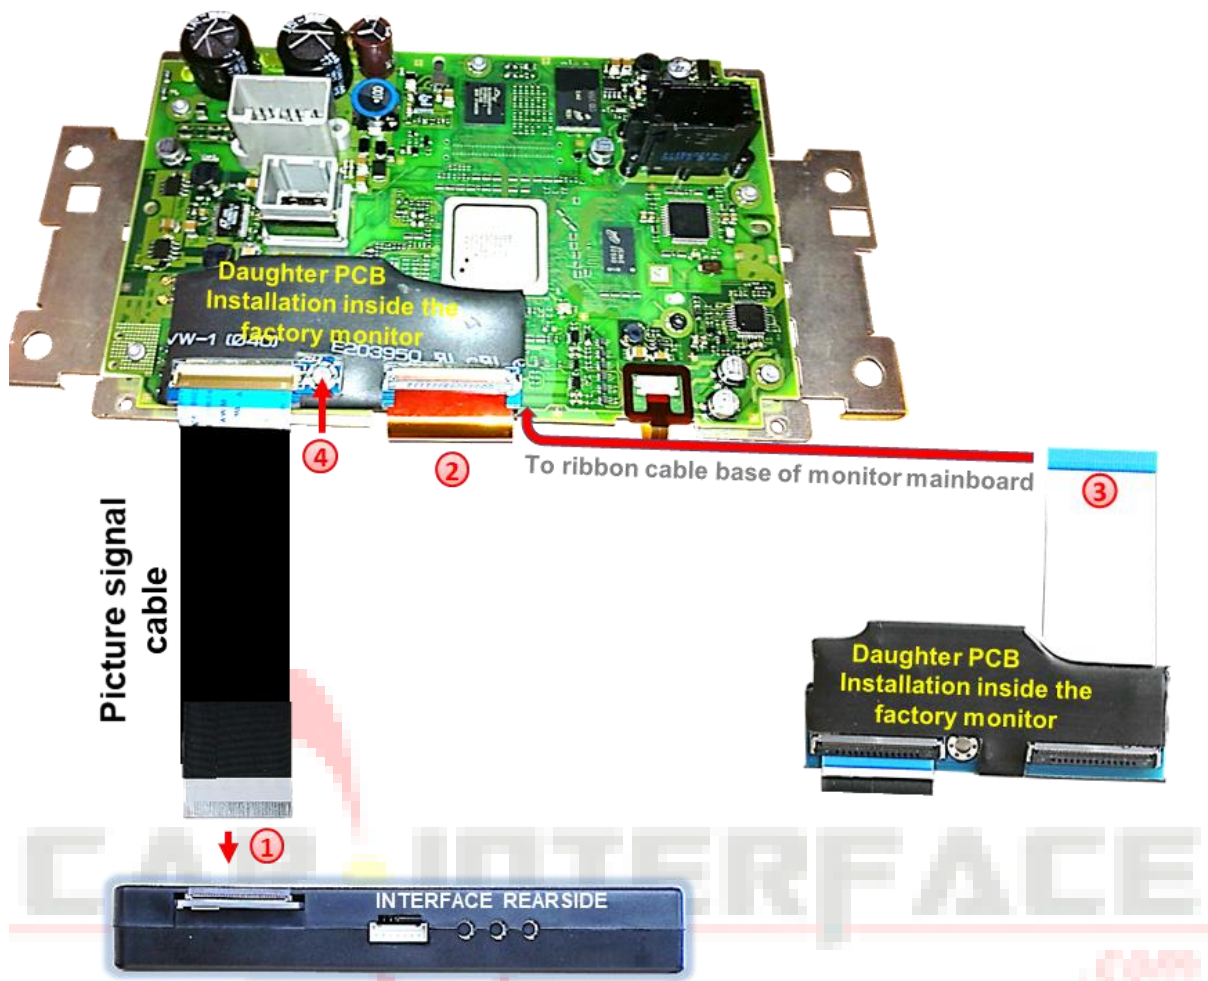

- ① Unclip the original copper coloured 50pin ribbon cable from the 50pin ribbon cable base of the monitor's mainboard and connect it to the 50pin ribbon cable base on the top-side of the daughter PCB and clip it in again.
- ② Connect the 50pin ribbon cable which is pre-mounted on the bottom of the daughter PCB to the previously become free 50pin ribbon cable base on the monitor's mainboard and clip it in place.
- ③ Secure the daughter PCB to the monitor's mainboard, using the original screw.
- ④ Connect the daughter PCB's long pre-connected 50pin ribbon cable to the 50pin ribbon cable base of the video interface.

### 2.5.1. Connection - Warning notes, concerning the installation of ribbon cables:


**1) The contacting ends of ribbon cables always have to be installed in a straight and precise 180° position to the connector. Each deviation from a perfect contact position will cause faulty contact and even danger of short circuit**

**2) The ribbon cable's contacting side always has to correspond to the contacting side of the connector, concerning the mounting position.**

## 2.6. Connection - Video-sources

It is possible to connect two after-market video sources and one after-market rear-view camera to the video-interface.

Before final installation of the peripheral devices, we recommend a test-run to detect a incompatibility of vehicle and interface. Due to changes in the production of the vehicle manufacturer there's always a possibility of incompatibility.

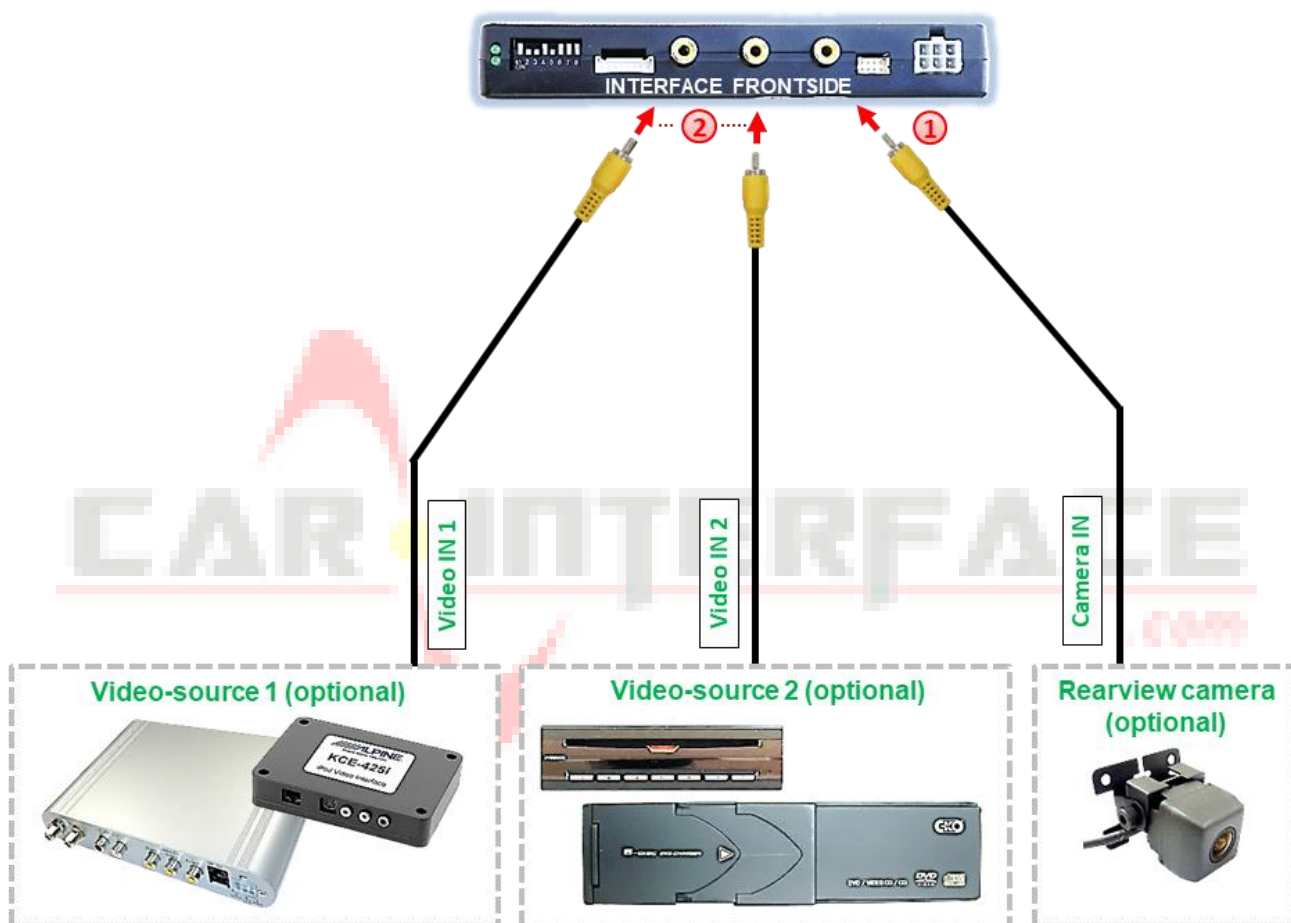


- 1 Connect the rear-view camera's male RCA to the video interface's female RCA „Camera IN”.
- 2 Connect the male RCAs of possibly existing video sources 1 and 2 to the video interface's female RCAs „Video IN1” and „Video IN2”.

## 2.7. Audio-switch and audio-insertion

This interface is only able to insert video signals into the factory infotainment and switch audio signals. If an AV-source is connected to AV1 or AV2, audio insertion must be done by factory audio AUX input or FM-modulator to which the interface's sound-switch output is connected. When the interface is switched from AV1 to AV2, the audio signal is switched parallel to the corresponding video signal by the interface's built-in audio-switch. The inserted video-signal can be activated simultaneously to each audio-mode of the factory infotainment.

Audio pins	Definition
1/2	Audio input signal R/L of source AV2
3/4	Audio input signal R/L of source AV1
5/6	Audio output signal R/L for factory audio AUX or FM-modulator
7	Ground

**Note:** If only one AV-source shall be connected, it is possible to connect the audio output of the AV-source directly to the point of audio-insertion (e.g. audio AUX input).

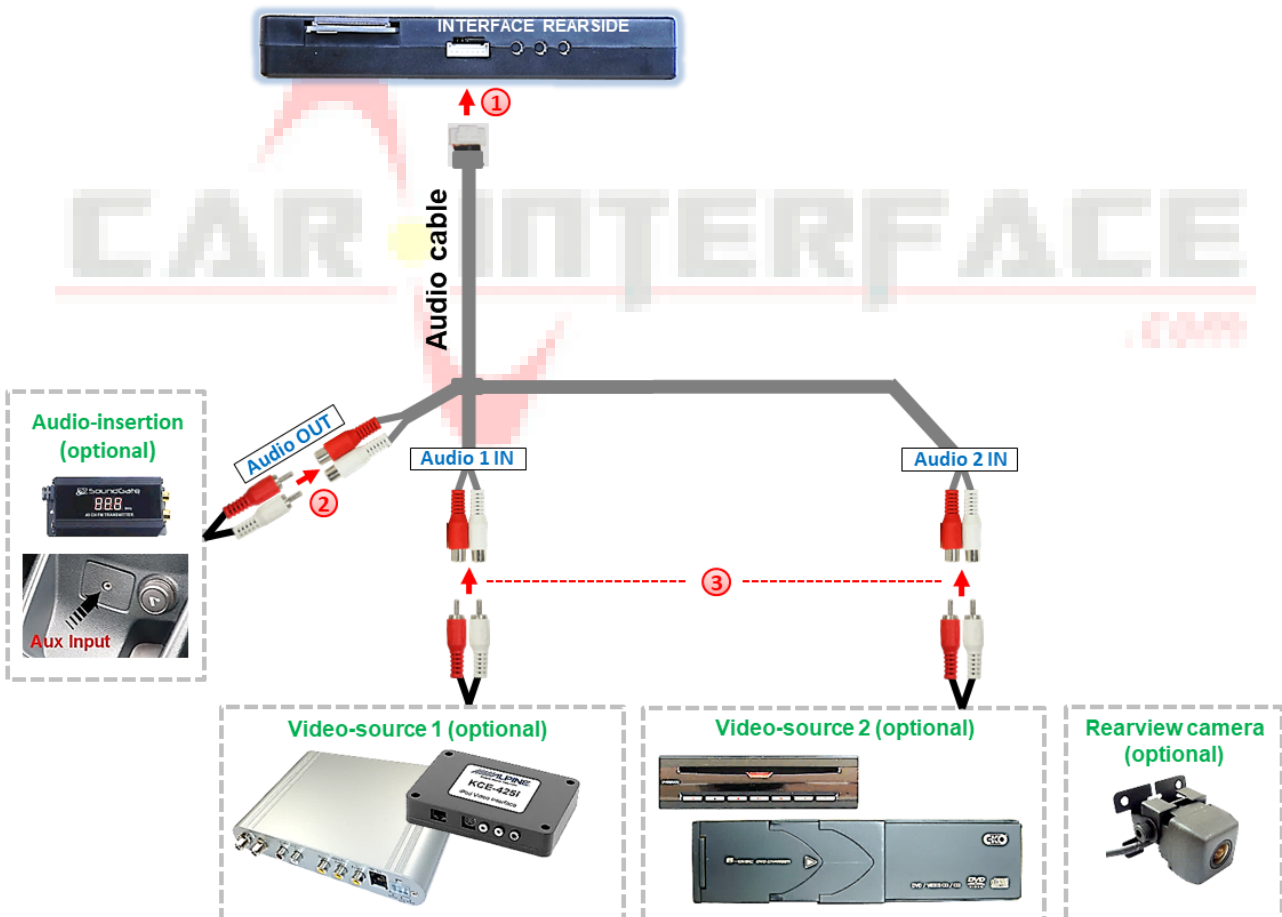


- 1 Connect the audio cable's female 7pin connector to the male 7pin connector of the video-interface.
- 2 Connect the audio-RCA connectors of possibly existing factory AUX-input or FM-modulator to the audio cable's female RCA "Audio OUT".
- 3 Connect the audio-RCA connectors of possibly existing AV-sources 1 and 2 to the female RCAs of the audio cable's „Audio 1 IN“ und „Audio 2 IN“.

## 2.8. After-market rear-view camera

Some vehicles have a different reverse gear code on the CAN-bus which the included CAN-box is not compatible with. In this case there are two different ways of installation. If the CAN-box is able to detect an enabled vehicle's reverse gear, the green wire of the 6pin to 8pin cable carries +12V while the reverse gear is engaged.

### 2.8.1. Case 1: CAN-box receives the reverse gear signal


If the CAN-bus box delivers +12V on the green wire of the 6pin to 8pin cable while reverse gear is engaged, the video interface will automatically switch to the rear-view camera input „CAMERA IN“ when the reverse gear is engaged.

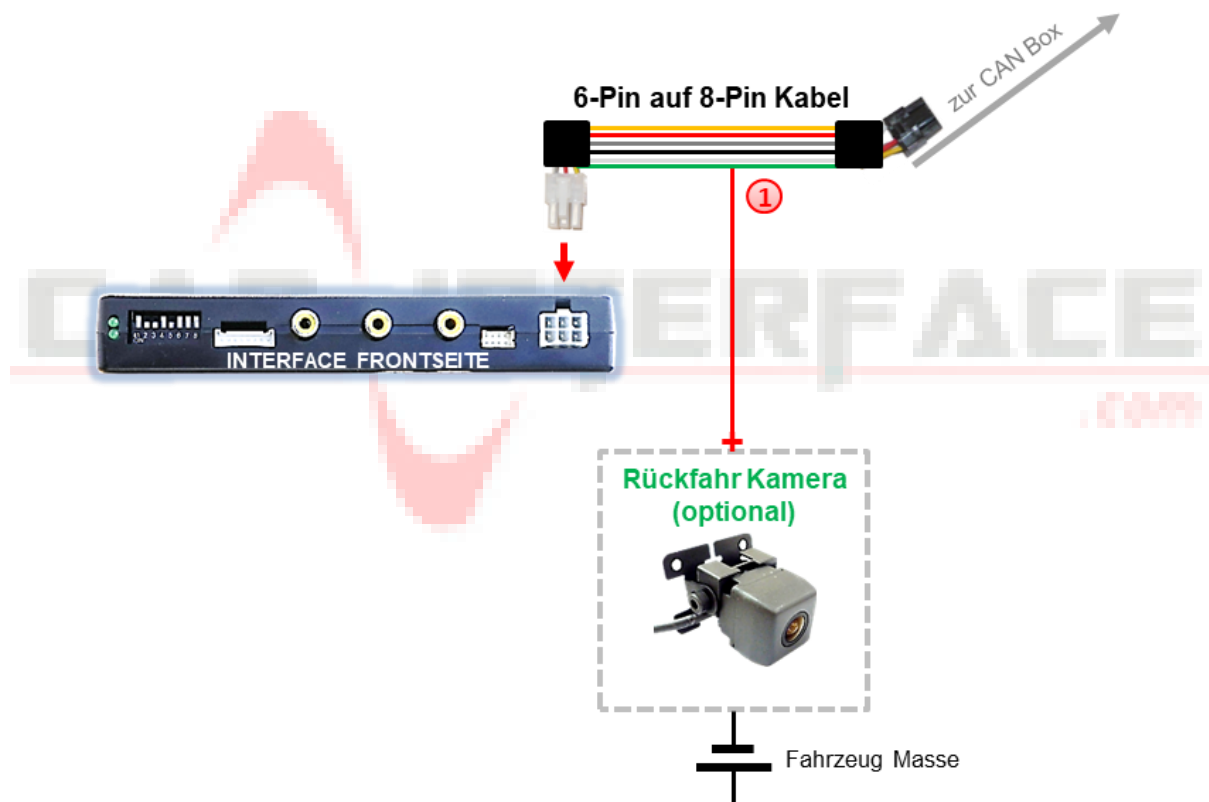

- 1 Additionally, the +12V (max. 500mA) power supply for the rear-view camera can be taken from the green wire of the 6pin to 8pin cable.

## 2.8.2. . Case 2: CAN-box does not receive the reverse gear signal

If the CAN-bus interface does not receive +12V on the green wire of the 6pin to 8pin cable when reverse gear is engaged (not all vehicles are compatible) an external switching signal from the reverse gear light is required. As the reverse gear light signal contains electronic interference, a traditional open relay (e.g AC-RW-1230 with wiring AC-RS5) or filter (e.g. AC-PNF-RVC) is required. Below schema shows the use of a relay (normally open).

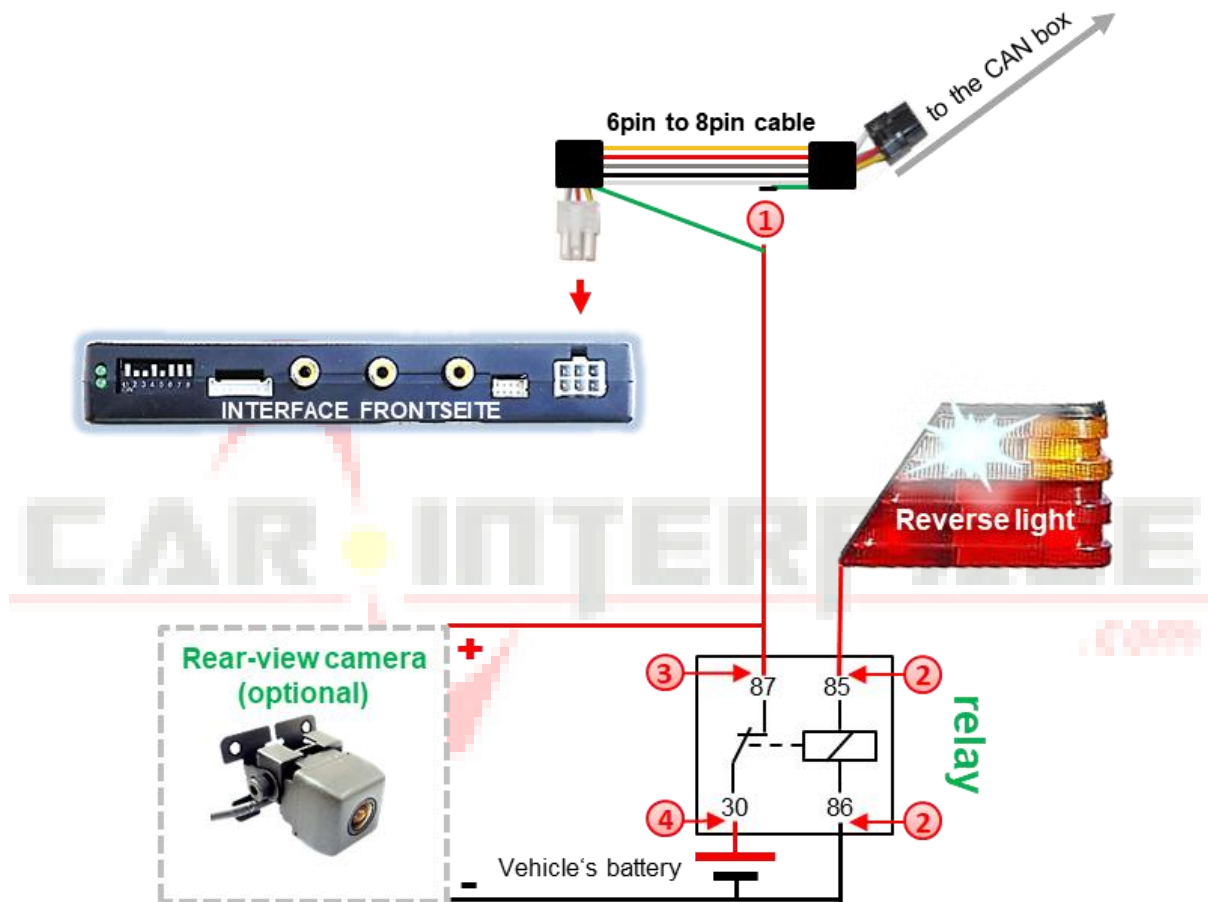


- 1 Cut the green cable of the 6pin to 8pin cable close to the black 8pin connector and isolate the shorter end of the green cable near to the 8pin connector (CAN-box side).
- 2 Connect the reverse gear light signal/power to coil terminal (85) and vehicle's ground to coil terminal (86) of relay.
- 3 Connect the rear-view camera power wire and the green wire (video interface side) of the 6pin to 8pin cable both to output terminal (87) of the relay.
- 4 Connect permanent battery power to input terminal (30) of relay.



**Note:** If, due to a missing CAN communication, the 6pin to 8pin cable has been connected the analogue way instead of the Can box, the green wire's connection has also to be done as shown in the picture above.


## 2.9. Connection - video-interface to external keypad

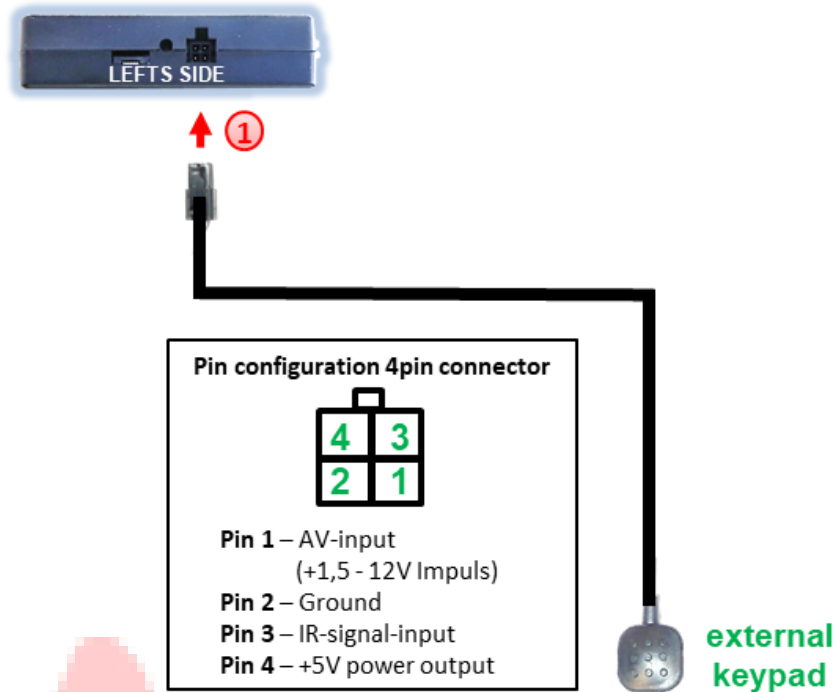

- ① Connect the keypad's female 4pin connector to the video-interface's male 4pin connector.

**Note:** Even if the switching through several video sources by the keypad mightn't be required, the invisible connection and availability is strongly recommended.

## 2.10. Picture settings

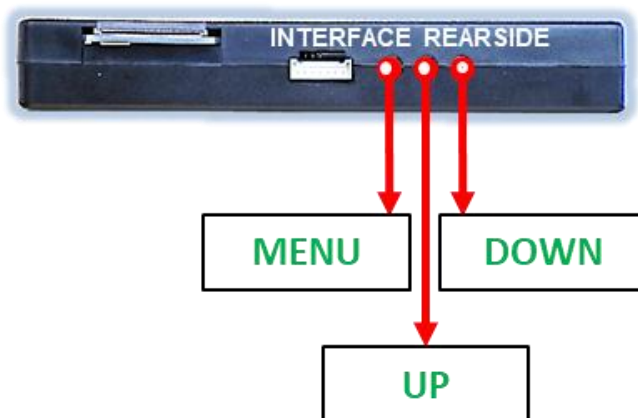

The picture settings are adjustable by the 3 push-buttons on the video-interface. Press the MENU button to open the OSD settings menu or to switch to the next menu item. Press UP and DOWN to change the selected value. The buttons are placed inside in the housing to avoid accidental changes during or after the installation. Picture settings must be done separately for AV1 and AV2 while the corresponding input is selected and visible on the monitor. AV2 and CAM may share the same settings which have to be adjusted in AV2 in this case.

**Note:** The OSD menu is only shown when a working video source is connected to the selected video-input of the interface.


The following settings are available:

Contrast		
Brightness		
Saturation		
Sharpness		
AV1/2	=	no function
RGB in		no function



Press the MENU button twice to set the picture position (another menu opens):

V POS	=	vertical position
H POS	=	horizontal position

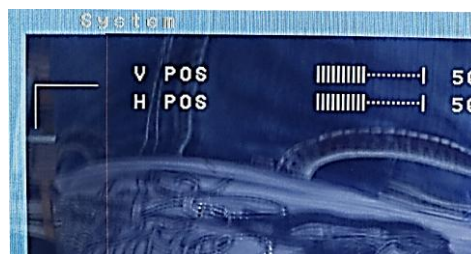

## 3. Video interface operation

### 3.1. By infotainment buttons



To switch the video sources the **EXIT** button can be used.

A **long press** of the key switches to the next activated video input. If all inputs are enabled the order is:

*Factory video → video IN1 → video IN2 → factory video →...*

Disabled inputs will be skipped. While switching from **Video IN1** to **Video IN2** the audio-source will be switched too, assuming the sources have also been connected to the audio cable.

**Switchover by vehicle buttons isn't possible in all vehicles. In some vehicles the external keypad or the 6pin cable's white wire has to be used (see following chapter).**

### 3.2. By external keypad

Alternatively, or additionally to the factory infotainment buttons, the interface's external keypad can be used to switch the enabled inputs (press 2-3 seconds).

### 3.3. By white wire of the 6pin cable

Alternatively, or additionally to the factory infotainment buttons, the 6pin cable's white wire can be used to switch the enabled inputs (with +5V or +12V impulse).

## 4. Specifications

BATT/ACC range	7V - 25V
Stand-by power drain	1mA
Power	145mA
Video input	0.7V - 1V
Video input formats	NTSC
RGB-video amplitude	0.7V with 75 Ohm impedance
Temperature range	-40°C to +85°C
Dimensions video-box	159 x 25 x 108 mm (B x H x T)
Dimensions CAN-box	72 x 22 x 43 mm (B x H x T)



## 5. FAQ – Trouble shooting Interface functions

For any troubles which may occur, check the following table for a solution before requesting support from your vendor.

Symptom	Reason	Possible solution
No picture/black picture (factory picture).	Not all connectors have been reconnected to factory head-unit or monitor after installation.	Connect missing connectors.
	No power on CAN-bus box (all LED CAN-bus box are off).	Check power supply of CAN-bus box. Check CAN-bus connection of CAN-bus box.
	CAN-bus box connected to CAN-bus in wrong place.	Refer to the manual where to connected to the CAN-bus. If not mentioned, try another place to connect to the CAN-bus.
	No power on video-interface (all LED video-interface are off).	Check whether CAN-bus box delivers +12V ACC on red wire output of 8pin to 6pin cable. If not cut wire and supply ACC +12V directly to video-interface.
No picture/black picture/white picture (inserted picture) but factory picture is OK.	No picture from video source.	Check on other monitor whether video source is OK.
	No video-source connected to the selected interface input.	Check settings dips 1 to 3 of video interface which inputs are activated and switch to corresponding input(s).
	LVDS cables plugged in wrong place.	Double-check whether order of LVDS cables is exactly connected according to manual. Plugging into head-unit does not work when the manual says to plug into monitor and vice versa.
Inserted picture totally wrong size or position.	Wrong monitor settings of video-interface.	Try different combinations of dips 7 and 8 of video-interface. Unplug 6pin power after each change.
Inserted picture double or 4 times on monitor.		
Inserted picture distorted, flickering or running vertically.	Video sources output set to AUTO or MULTI which causes a conflict with the interfaces auto detection.	Set video source output fixed to PAL or NTSC. It is best to set all video sources to the same standard.
	If error occurs only after source switching: Connected sources are not set to the same TV standard.	Set all video sources to the same standard.
	Some interfaces can only handle NTSC input.	Check manual whether there is a limitation to NTSC mentioned. If yes, set source fixed to NTSC output.
Inserted picture b/w.	Picture settings have not been adjusted.	Use the 3 buttons and the interface's OSD to adjust the picture settings for the corresponding video input.
Inserted picture qual. bad.		
Inserted picture size slightly wrong.		
Inserted picture position wrong.		
Camera input picture flickers.	Camera is being tested under fluorescent light which shines directly into the camera.	Test camera under natural light outside the garage.
Camera input picture is bluish.	Protection sticker not removed from camera lens.	Remove protection sticker from lens.

Symptom	Reason	Possible solution
Camera input picture black.	Camera power taken directly from reverse gear lamp.	Use relay or electronics to "clean" reverse gear lamp power. Alternatively, if CAN-bus box is compatible with the vehicle, camera power can be taken from green wire of 6pin to 8pin cable.
Camera input picture has distortion.		
Camera input picture settings cannot be adjusted.	Camera input picture settings can only be adjusted in AV2 mode.	Set dip 3 of video-interface to ON (if not input AV2 is not already activated) and connect the camera to AV2. Switch to AV2 and adjust settings. Reconnect camera to camera input and deactivate AV2 if not used for other source.
Graphics of a car in camera input picture.	Function PDC is ON in the interface OSD.	In compatible vehicles, the graphics will display the factory PDC distance. If not working or not wanted, set interface OSD menu item UI-CNTRL to ALLOFF.
Chinese signs in camera input picture	Function RET or ALL is ON (function for Asian market) in the interface OSD.	Set interface OSD menu item UI-CNTRL to ALLOFF or PDCON.
Not possible to switch video sources by OEM button.	CAN-bus interface does not support this function for vehicle.	Use external keypad or cut white wire of 6pin to 8pin cable and apply +12V impulses for AV-switching.
Not possible to switch video sources by external keypad.	Pressed too short.	For video source switching a longer press of about 2.5 seconds is required.
	SW-version of interface does not support external keypad.	Use OEM-button or cut white wire of 6pin to 8pin cable and apply +12V impulses for AV-switching.
Interface does not switch to camera input when reverse gear is engaged.	CAN-bus interface does not support this function for the vehicles.	Cut the green wire of the 6pin to 8pin cable and apply +12V constant from reverse gear-lamp signal. Use relay to "clean" R-gear lamp power.
Interface switches video-sources by itself.	CAN-bus interface compatibility to vehicle is limited.	Cut the grey wire of 6pin to 8pin and isolate both ends. If problem still occurs, additionally cut the white wire of 6pin to 8pin cable and isolate both ends.



10R-05 0068

Made in China

