适用于 Romeo、Giulietta

車載無線智聯終端

說明書



Car mounted wireless intelligent connection terminal

敬請註意:

尊敬的用戶您好,在您安裝好本系統後針對部分沒有AUX的車型需要通過原車藍牙傳輸聲音的時候請先進入原車系統藍牙電話 頁面,利用車機「藍牙電話」主動搜索或等待搜索本系統的藍牙設備「DC_AUDIO_BT_****」,待本系統藍牙與車載藍牙電話連接 成功以後進入到原車藍牙音頻功能,再按相應按鍵切換到系統頁面,開始後續操作。

Please note:

Dear user, after installing this system, for some models without AUX that require sound transmission through the original car Bluetooth, please first enter the original car system Bluetooth phone page and use the car's "Bluetooth phone" to actively search or wait for the Bluetooth device "DC_AUDIO_BT_****" of this system. After the Bluetooth of this system is successfully connected to the car's Bluetooth phone, enter the original car Bluetooth audio function, Press the corresponding button again to switch to the system page and start subsequent operations.

免責聲明 Disclaimer:

Apple、iPhone、Carplay和Carplay標誌是蘋果公司的註冊商標和所有權

Apple, iPhone, Carplay, and the Carplay logo are registered trademarks and ownership of Apple Corporation Android, Google Maps, Android auto和Waze是Google 公司的註冊商標和所有權

Android, Google Maps, Android auto, and Waze are registered trademarks and ownership of Google Corporation

百度、Carlife和carlife標誌是百度公司的註冊商標和所有權

Baidu, Carlife, and the Carlife logo are registered trademarks and ownership of Baidu Company

華為、華為hicar和hicar標誌是華為公司的註冊商標和所有權

Huawei, Huawei Hicar, and the Hicar logo are registered trademarks and ownership of Huawei Corporation

產品外形尺寸 Overall dimensions of products: 148mm(长)*91mm(宽)*29mm(厚)

主芯片型號 Main chip model: T113-S 功耗電流 Power consumption current: 1A (rated) , 3A (Max)

主頻率 Dominant frequency: 1.2GHz 工作溫度 operating temperature: -40°C~+85°C


內存 Memory: 256MB DDRIII SDRAM 環境濕度 Ambient humidity: ≤98% (at45°C) , 65±5% (rated)

存儲空間 Storage space: 128MB NAND Flash 靜態電流 quiescent current: less than 3mA

工作電壓 running voltage: 9-16V,14.4V(rated) 摔落測試 Drop test: 設備從30inches(76cm)高度摔落后可正常工作

充電電流 charging current: ≤ 1.5A. 當USB充電電流> 3A時, 系統快充單元的智能芯片將自動啟動電路保護,將充電電流控制在1.5A以下,保護手機充電過載. ≤1.5A. when the USB charging current is > 3A, the host computer of the radio and receiver should start the circuit protection function to control the current below 1.5A to avoid burning the product.


NO.2 Romeo連線示意圖 / Schematic diagram of connection

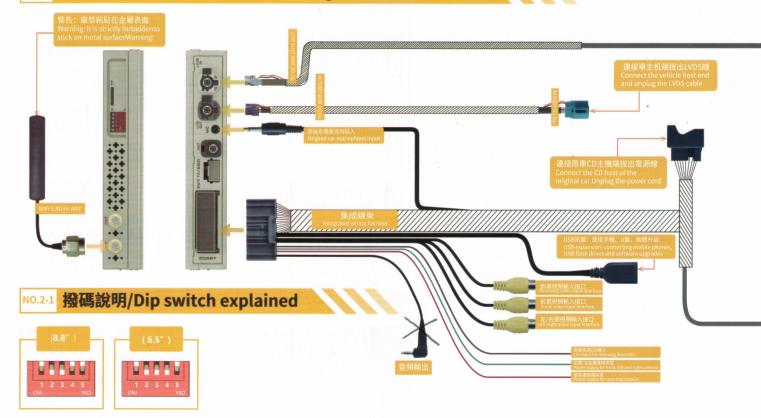

连接原车cd主机端 (原车线束上如有光纤线请拔 出并插入此插头对应的位置) Connect the original car CD host end (if there is any fiber optic cable on the original car harness, please unplug and insert it into the corresponding position of this plug)



NO.3 Romeo按鍵操作說明/Operating instructions for steering wheel buttons

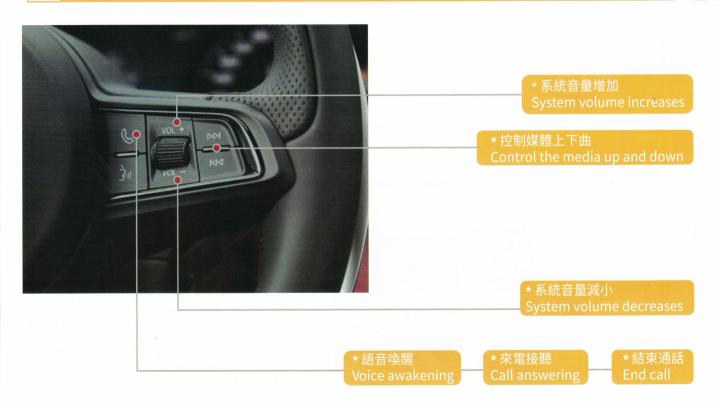

* 控制媒體上下曲 Control the media up and dowr

- * Idrive旋鈕控制系統APP Idrive knob control system APP
- * 按下進入APP功能

Press to enter the APP function

* 方向鍵控制光標移動

The arrow keys control cursor movement

* 長按2秒進入系統頁面


Press and hold for 2 seconds to enter the system page

* 短按回系統主頁面HOME

Short press back to the HOME page of the system



Giulietta連線示意圖 / Schematic diagram of connection

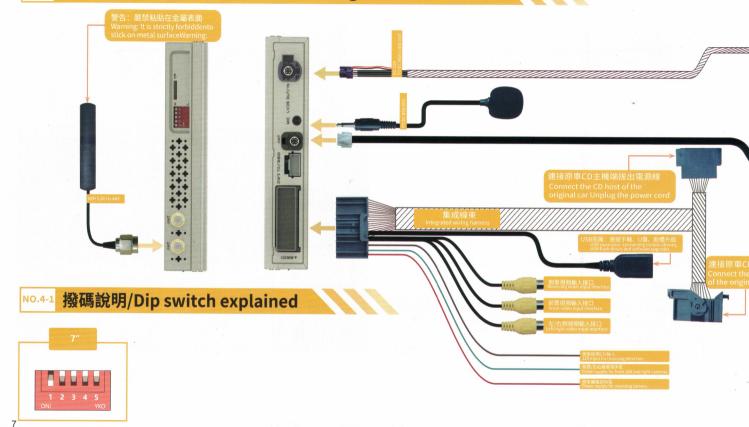



請按①——⑧序列安裝



















5

Giulietta按鍵操作說明/Operating instructions for steering wheel buttons

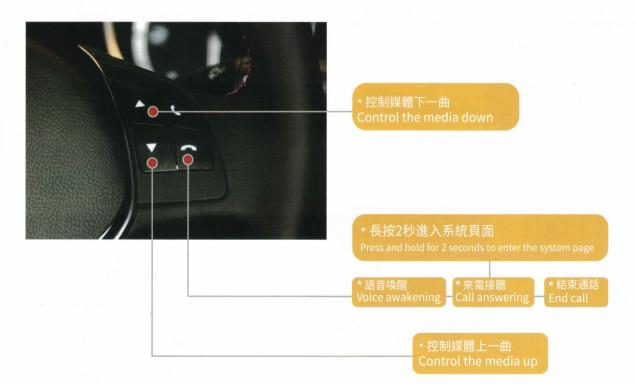



* 觸摸控制APP Touch control API































智慧出行 本地媒体

在线音乐

DSP音效

声控交互

无缝交互

AHD IN

CE认证

FCC认证 SRRC认证 RoHS认证

AUTHORIZED DEALER

GB 4943.1-2011